




NYLON SPRING CHECK VALVE

Description:

1 600 KPA

-20 TO 120 Deg, C

1. BODY: PA66+30% Fiber Glass;
2. DISC: Polycarbonate
3. WASHER: PP-R;
4. RUBBER WASHER: EPDM;
5. DISC: Polycarbonate
6. SPRING: 304 Stainless Steel;

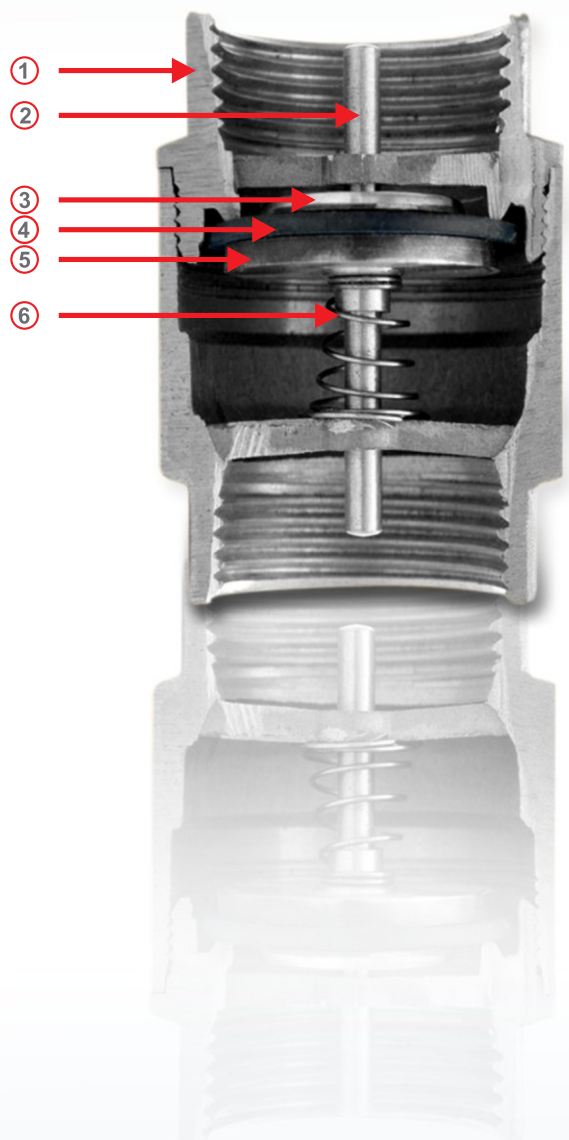

**NYLON AND POLYCARBONATE HAVE EXCELLENT RESISTANCE
TO MANY CHEMICALS AS WELL AS ABRASIVE MATERIALS**